

# HD 13 VT

Tandem roller with vibrating roller drum and set of tyres


Tandem rollers Series HD CompactLine / Series H201









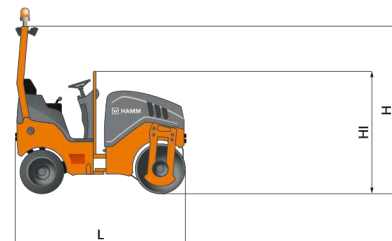

## HIGHLIGHTS HD CompactLine

- > Optimum front view due to concaving front end
- > Good visibility — optimum view of drum's outer edges
- > Ergonomic driver platform
- > Modern instrument panel
- > Low machine height
- > 3-point swivel joint for optimum driving comfort
- > Convenient maintenance and service

Machine dimensions		
Total length (L)	mm	2860
Width (B)	mm	1426
Total height (H)	mm	2590
Drum width (X)	mm	1300
Height loading, min. (HI)	mm	1820



TECHNICAL DATA		Unit	HD 13 VT
	<b>Weights</b>		
	Operating weight with ROPS	kg	3825
	Operating weight, max.	kg	4790
	Static linear load, front	kg/cm	15,5
	<b>Machine dimensions</b>		
	Total length	mm	2860
	Total height with cab	mm	2720
	Total height with ROPS	mm	2590
	Height loading, min.	mm	1820
	Wheel base	mm	1950
	Total width	mm	1426
	Max. working width	mm	1338
	Ground clearance, left/right	mm	720/720
	Turning radius, inside	mm	2690
	<b>Drum dimensions</b>		
	Drum width, front	mm	1300
	Drum diameter, front	mm	900
	Drum thickness, front	mm	17
	Drum type, front		smooth/non-divided
	Track offset, left/right	mm	0/50
	<b>Wheel dimensions</b>		
	Size of tyres, rear		10.5/80-16
	Width over tyres, rear	mm	1276
	Number of tyres, rear		4
	<b>Diesel engine</b>		
	Manufacturer		KUBOTA
	Version		V2203
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		34,6/47,1/2700
	Power rating SAE J1349, kW/HP/rpm		34,6/46,4/2700
	Emissions standard EU/USA		EU Stage IIIA
	Exhaust gas after-treatment		-
	<b>Drive</b>		
	Speed, infinitely variable	km/h	0 - 11,0
	Climbing ability, vibration on/off	%	30/40
	<b>Vibration</b>		
	Vibration frequency, front, I/II	Hz	60/51
	Amplitude, front, I/II	mm	0,51/0,31
	Centrifugal force, front, I/II	kN	64/39
	<b>Steering</b>		
	Oscillation angle +/-	°	8
	Steering, type		Articulated steering
	<b>Sprinkler system</b>		
	Water sprinkler, type		Pressure
	<b>Tank capacity/Fill capacity</b>		
	Fuel tank, capacity	L	73
	Water tank, capacity	L	285
	Additive tank, capacity	L	18
	<b>Sound level</b>		
	Acoustic power LW(A), sticker		106
	Acoustic power LW(A), measured		104

#### EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform, Track offset, Vibration front and rear, switchable single and doubled

#### OPTIONAL EQUIPMENT

All-wheel lock, Tow hitch, Working lights, Back-up alarm (reversing), Driver's seat with seat heating, black imitation leather, comfort equipment, Anti-freeze injection system, Edge pressing and cutting equipment, ROPS, foldable, Rotating beacon, Protective roof, Chip spreader, Water drain valve, ROPS cabin with heating, V-belt protection, Plastic scraper, foldable, Automatic engine-off function, WIFMS fleet management interface, Drum edge lighting, Tow eye, at the front

**HAMM AG**  
Hammstraße 1  
D-95643 Tirschenreuth  
Tel. +49 9631 80-0  
Fax +49 9631 80-111  
www.hamm.eu

