


STATIC DIMENSIONS AND CAPACITIES

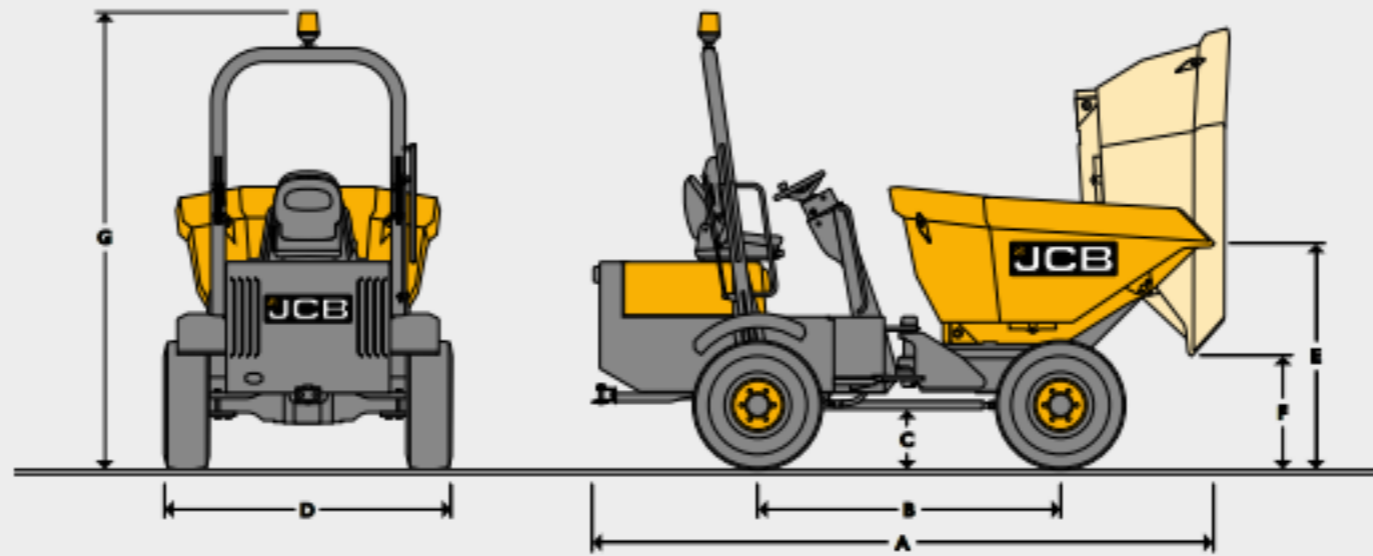

		1THT	2TFT	2TST	2THS	3TFT	3TST	3TFT	3TST	3.5TST	6TFT	6TST	9TFT	10TFT	
A	Overall length	mm	2980	3570	3550		3725	3952	3725	3952	4405	4539	4489	4530	
B	Wheel base	mm	1440	1900		1939	1939	1939	1939	1939	2450	2450	2450	2450	
C	Minimum ground clearance	mm	241	184		279				385	410				
D	Width	mm	998* / 1120	1492		1957	1846	1957	1846	1846	2300	2207	2502	2550	
E	Height to front lip of skip (untipped)	mm	1167	1323	1360	1522	1371	1467	1371	1467	1467	1672	1732	1709	1760
F	Height to front lip of skip (tipped)	mm	1620 (raised)	916	983	1142 (lowered) / 1640 (raised)	208	762	208	762	762	504	1258	560	440
	Turning radius to outside of skip	mm	2295	3680	3680	3680	4711	4553	4711	4553	4553	5863	5726	5994	6011
	Steering angle		+/- 45°	+/- 30.6°		+/- 30°		+/- 30°				+/- 30°			
	Oscillation		+/- 14°	+/- 10.5°		+/- 10.5°		+/- 10.5°				+/- 10°			
G	Height to top of ROPS (raised with beacon)	mm	2832	2920		2920		2920		3203		3738			

\*When fitted with narrow tyres

CAPACITIES

Payload	kg	1000	2000	2000	2000	3000	3000	3000	3000	3500	6000	6000	9000	10000
Unladen weight	kg	1350	N/A	N/A	2320	2300	2330	2320	2340	2340	4275	4480	4920	N/A
Tipping type		Front tip - High tip	Front tip	Swivel tip	Swivel tip - High tip	Front tip	Swivel tip	Front tip	Swivel tip	Swivel tip	Front tip	Swivel tip	Front tip	Front tip
Skip capacity (water)	litres	320	750	750	750	1250	1000	1250	1000	1000	1950	1850	2064	2446
Skip capacity (struck)	litres	450	1000	1000	1000	1600	1520	1600	1520	1520	2750	2740	3899	4128
Skip capacity (heaped)	litres	540	1200	1200	1200	1950	1880	1950	1880	1880	3780	3530	4587	5046

\*When fitted with narrow tyres

ENGINE

Type		1THT	2TFT	2TST	2THS	3TFT	3TST	3TFT	3TST	3.5TST	6TFT	6TST	9TFT	10TFT
Engine model		Kubota D905	Kubota DI703M		Kubota V2203M		JCB EcoMAX		JCB EcoMAX					
Capacity	cc	898	1647		2197		4400		4400					
Aspiration		Naturally Aspirated	Naturally Aspirated		Naturally Aspirated		Turbocharged		Turbocharged					
Cylinders		3	3		4		4		4					
Max gross power to SAE J1995/ISO 14396	kW (hp)	15.5 (20.8)	24.5 (32.6)		32.4 (43.5)		55 (74)		55 (74)					
Max torque	Nm	56	105		147		400		400					
Emissions compliance		EU Stage 3A	EU Stage 3A		EU Stage 3A		EU Stage 3B / Tier 4 Final		EU Stage 3B / Tier 4 Final					